APP CRS	Rwy ldg	11870
281°	TDZE	13
	Apt Elev	13

RNAV (RNP) Y RWY 28R
SAN FRANCISCO INTL (SFO)

T A NA — For uncompensated Baro-VNAV systems, procedure NA below 2°C (36°F) or above 48°C (119°F). For inoperative ALSF increase RNP 0.30 visibility to RVR 5000 all Cats. RF, GPS, and RADAR REQUIRED.

ALSF-2

MISSED APPROACH: Climb to 6000 via 281° track to ELMMS and via 5 NM radius to GOYBE and via 075° track to SALAD and hold. #

ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON	CLNC DEL
113.7 115.8 118.85 135.45	134.5 338.2	120.5 269.1	121.8	118.2

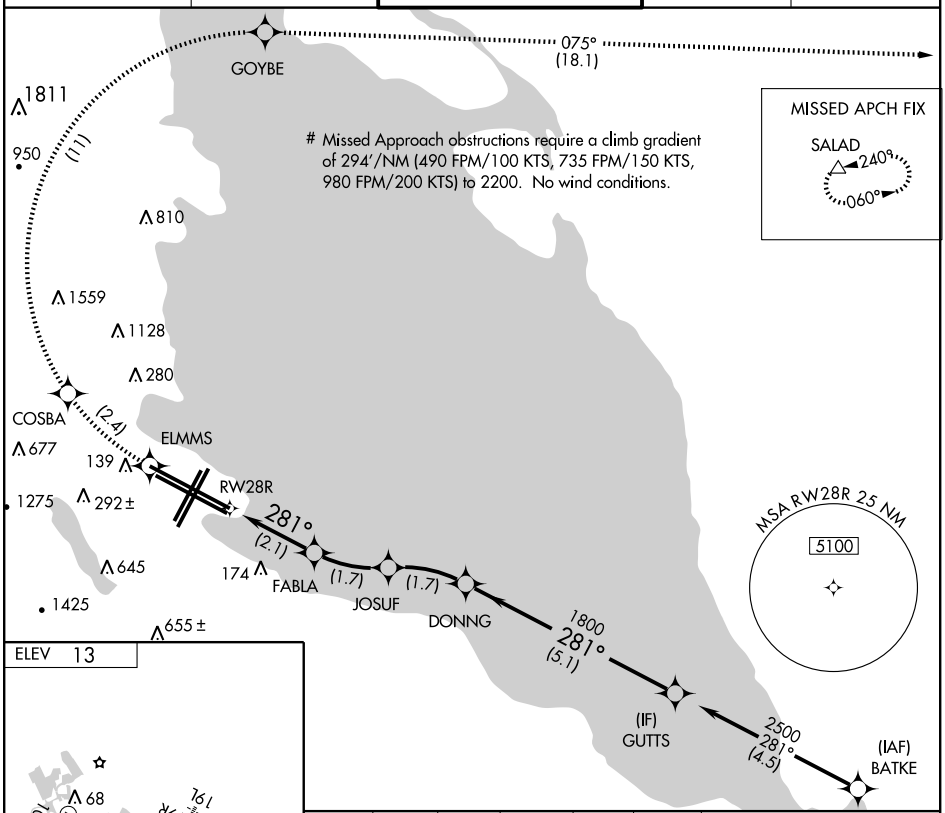

ELEV 13



TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all Rwys

6000 281° trk	ELMMS	5 NM radius	GOYBE	075° trk	SALAD	Procedure Turn NA	GUTTS

RW28R — FABLA 757 — JOSUF 1282 — DONNG 1800 — 281° — 2500 — 1800

GP 3.00°
TCH 54

2.1 NM — 1.7 NM — 1.7 NM — 5.1 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	328/32 315 (400-⅝)			

SPECIAL AIRCRAFT & AIRCREW AUTHORIZATION REQUIRED

SW-2, 14 JAN 2010 to 11 FEB 2010
SW-2, 14 JAN 2010 to 11 FEB 2010